


This map accompanies the Coal Mines Directory for the Minooka Quadrangle. Consult the directory for a complete explanation of the information shown on this map.



DIRECTORY OF COAL MINES IN ILLINOIS 7.5-MINUTE QUADRANGLE SERIES MINOOKA QUADRANGLE GRUNDY COUNTY

Alan R. Myers & Jennifer M. Obrad



Department of Natural Resources
ILLINOIS STATE GEOLOGICAL SURVEY
2005
REVISED 2007

**DIRECTORY OF COAL MINES IN ILLINOIS
7.5-MINUTE QUADRANGLE SERIES
MINOOKA QUADRANGLE
GRUNDY COUNTY**

2005
REVISED 2007

ILLINOIS STATE GEOLOGICAL SURVEY
William Shilts, Chief

Natural Resources Building
615 East Peabody Drive
Champaign, Illinois 61820

Phone 1-217-244-4610
Fax 1-217-333-2830

Cover photo Track-mounted duckbill loading machine at a Peabody Coal Company mine, ca. 1915.

DISCLAIMER: The accuracy and completeness of mine maps and directories vary with the availability of reliable information. Maps and other information used to compile this mine map and directory were obtained from a variety of sources and the accuracy of some of the original information cannot be verified. Consequently, the Illinois State Geological Survey (ISGS) cannot guarantee the mine maps are free of errors and disclaims any responsibility for damages that may result from actions or decisions based on them.

The ISGS updates the maps and directories periodically, and welcomes any new information or corrections. Please contact the Coal Section of the ISGS at the address shown on the title page of this directory, or telephone (217) 244-4610.

Printed by authority of the State of Illinois/2007

CONTENTS

INTRODUCTION	1
MINING IN THE MINOOKA QUADRANGLE	1
PART I EXPLANATION OF MAP AND MINE SUMMARY SHEET	2
INTERPRETING THE MAP	2
Mine Type and Mining Method	2
SOURCE MAPS	3
POINTS AND LABELS	3
INTERPRETING A MINE SUMMARY SHEET	6
REFERENCES	8
PART II DIRECTORY OF MINES IN THE MINOOKA QUADRANGLE	9
MINE SUMMARY SHEETS	9
Mine Index 625	
Morris Coal & Mining Company, Morocco Mine	9
Mine Index 2391	
Northwestern Coal Corporation, Morris Mine	10
OTHER MINES SHOWN ON MINOOKA QUADRANGLE	11
Mine Index 3195, Petty Mine	11
Mine Index 5465	11
Mine Index 5508	11
Mine Index 5509	11
Mine Index 5525	11
MINES WHOSE LOCATIONS ARE NOT KNOWN, MINOOKA QUADRANGLE	11
INDEX OF MINES IN THE MINOOKA QUADRANGLE	13

INTRODUCTION

Coal has been mined in 76 counties of Illinois. More than 7,400 coal mines have operated since commercial mining began in Illinois about 1810; fewer than 30 are currently active. To detail the extent and location of coal mining in Illinois, the Illinois State Geological Survey (ISGS) has compiled maps and directories of known coal mines. The ISGS offers maps at a scale of 1:100,000 and accompanying directories for each county in which coal mining is known to have occurred. Maps at a scale of 1:24,000 and accompanying directories such as this are available for selected quadrangles. Contact the ISGS for a list of these quadrangles.

These larger scale maps show the approximate positions of mines in relation to surface features such as roads and water bodies, and indicate the mining method used and the accuracy of the mine boundaries. The maps are useful for locating mine boundaries relative to specific properties and for assessing the potential for subsidence in an area. Mine boundaries compiled from final mine surveys are generally shown within 200 feet of their true position. As a result of poor cartographic quality and inaccuracies in the original mine surveys, boundaries of some older mines may be mislocated on the map by 500 feet or more. Original mine maps should be consulted in situations that require precise delineation of mine boundaries or internal workings of mined areas.

The directory serves as a key to the accompanying mine map and provides basic information on the coal mines. The directory is composed of two parts. Part I explains the symbols and patterns used on the accompanying map and the summary data presented for each mine. Part II numerically lists the mines in the quadrangle and summarizes the geology and production history of each mine.

MINING IN THE MINOOKA QUADRANGLE

Most of the Minooka Quadrangle is beyond the extent of the coal-bearing Pennsylvanian rocks. And the few mines in the quadrangle are confined to its southwestern corner. Two surface mines in the Lisbon Quadrangle to the west and only extend about 200 feet into the Minooka Quadrangle. The most recent surface mining in the Minooka Quadrangle ended in 1954.

The underground mining occurred earlier, all abandoned before 1934. According to Richard Patrick Joyce in *Miners of the Prairie: Life & Labor in the Wilmington, Illinois Coal Field, 1866-1897* (1980), Micajah Adams dug two loads of coal at Aux Sable in 1839-1840, and took coal to Chicago. By 1857, at least six mines were said to have been operating in the Dresden and Morris areas, which were small local mines that stripped 7 to 15 feet of topsoil to reach the coal. Worthen et al. noted the Petty Mine in 19-T34N-R8E in their 1870 work. The next known mine was shown on the 1874 Atlas of Grundy County, and two others were abandoned before 1919. The Colchester Coal was mined in this area, and was between 2 and 3 feet thick.

PART I EXPLANATION OF MAP AND MINE SUMMARY SHEET

INTERPRETING THE MAP

The map accompanying this directory shows the location of coal mines known to be present in the quadrangle. The map, corresponding to a U.S. Geological Survey (USGS) 7.5-minute quadrangle, covers an area bounded by lines of latitude and longitude 7.5-minutes apart. In Illinois, a quadrangle is approximately 6.5 miles east to west and 8.5 miles north to south, an area of about 56 square miles. The USGS generally offers one map of mines per quadrangle. In some areas where extensive mining occurred in two or more overlapping seams, separate maps are compiled for mines in each seam to maintain readability of the map.

Mine Type and Mining Method

The mine type is indicated on the map by pattern color: green represents surface mines; red and yellow represent underground mines. The red patterns are used for areas of underground mining that are documented by a primary or secondary source map. A yellow pattern is used for cases where no map of the mine workings is available, but a general area of mining can be inferred from property maps or production figures. The patterns indicate the main mining methods used in underground mines. The methods are (1) room and pillar and (2) high extraction. The method used gives some indication of the amount and pattern of coal extraction within each mined area, and has some influence on the timing and type of subsidence that can occur over a mine.

The following discussion and illustrations of mining methods are based on Guither et al. (1984).

In room-and-pillar mines, coal is removed from haulage-ways (entries) and selected areas called rooms. Pillars of unmined coal are left between the rooms to support the roof. Depending on the size of rooms and pillars, the amount of coal removed from the production areas will range from 40% to 70%.

Room and Pillar - mining is divided into six categories:

- room-and-pillar basic (RPB, fig. 1A), an early method that did not follow a preset mining plan and therefore resulted in very irregular designs;
- modified room and pillar (MRP, fig. 1B);
- room-and-pillar panel (RPP, fig. 1C);
- blind room and pillar (BRP, fig. 1D);
- checkerboard room and pillar (CRP, fig. 1E);
- room and pillar (RP), a classification used when the specific type of room-and-pillar mining is unknown.

Blind and checkerboard are the most common types of room-and-pillar mining used in Illinois today. The knowledge of room-and-pillar mining methods gives a trained engineer information on the nature of subsidence that may occur. A more extensive discussion of subsidence can be found in Bauer et al. (1993).

High-extraction These mining methods are subdivided into high-extraction retreat (HER, Fig 1F) and longwall (LW, Fig 1G, 1H). In these methods, much of the coal is removed within well defined areas of the mine. Subsidence of the surface above these areas occurs within weeks. Once the subsidence activity ceases, the potential for further movement over these areas is low; however, subsidence may continue for several years after mining.

High-extraction retreat mining is a form of room-and-pillar mining that extracts most of the coal. Rooms and pillars are developed in the panels, and the pillars are then systematically removed (fig. 1F).

In early (pre-1960) longwall mines, mining advanced in multiple directions from a central shaft (fig. 1G). Large pillars of coal were left around the shaft, but all coal was removed beyond these pillars. Miners placed rock and wooden props and cribs in the mined-out areas to support the mine roof. The overlying rock gradually settled onto these supports, thus producing subsidence at the surface. In post-1959 longwall mines, room-and-pillar methods have been used to develop the main entries of the mine and panel areas. Modern longwall methods extract 100 percent of the coal in the panel areas (fig. 1H).

SOURCE MAPS

Mine outlines depicted on the map are, whenever possible, based on maps made from original mine surveys. The process of compiling and digitizing the quadrangle map may produce errors of less than 200 feet in the location of mine boundaries. Larger errors of 500 feet or more are possible for mines that have incomplete or inaccurate source maps.

Because of the extreme complexity of some mine maps, detailed features of mined areas have been omitted. The digitized mine boundary includes the exterior boundary of all rooms or entries that were at least 80 feet wide or protruded 500 feet from the main mining area. Unmined areas between mines are shown if they are at least 80 feet wide; unmined blocks of coal within mines are shown if they are at least 400 feet on each side. Original source maps should be consulted when precise information on mine boundaries or interior features is needed.

The mine summary sheet lists the source maps used to determine each mine outline. The completeness of map sources is indicated on the map by a line symbol at the mine boundary. Source maps are organized in five categories.

Final mine map The mine outline was digitized from an original map made from mine surveys conducted within a few months after production ceased. The date of the map and the last reported production are listed on the summary sheet.

Not a final map The mine is currently active or the mine outline was made from a map based on mine surveys conducted more than a few months before production ceased. This implies the actual mined-out area is probably larger than the outline on the map. The mine summary sheet indicated the dates of source maps and the last reported production, as well as the approximate tonnage mined between these two dates (if the mine is abandoned). The summary sheet also lists the approximate acreage mined since the date of the map and, in some cases, indicates the area where additional mining may have taken place. This latter information is determined by locating on the map the active faces relative to probable boundaries of the mine property.

Undated map The source map was undated, so it may or may not be based on a final mine survey. When sufficient data are available, the probable acreage of the mined area is estimated from reported production, average seam thickness and a recovery rate comparable to other mines in the area. This information is listed in the summary sheet for the mine.

Incomplete map The source map did not show the entire mine. The summary sheet indicates the missing part of the mine map and the acreage of the unmaped area, which is estimated from the amount of coal known to have been produced from the mine.

Secondary source map The original mine map was not found so the outline shown was determined from secondary sources (e.g., outlines from small-scale regional maps published in other reports). The summary sheet describes the secondary sources.

POINTS AND LABELS

The locations of all known mine openings (shafts, slopes, and drifts) and surface mine tipples are plotted on the map. Tipples are areas where coal was cleaned, stockpiled, and loaded for shipping.

Only openings or tipples are plotted for mines without source maps. If the precise locations of these features are unknown, a special symbol is used to indicate the approximate location of the mine.

Each mine on the map is labeled with the names of the mine and operating company, ISGS mine index number, and years of operation (if known) if space permits. A seam designation is given on maps where more than one seam was mined. For a mine that operated under more than one name, only the most recent name is generally given. When a mine changed names or ownership shortly before closing, an earlier name is listed. All company and mine names are listed on the mine summary sheet in the directory, under the production history segment.

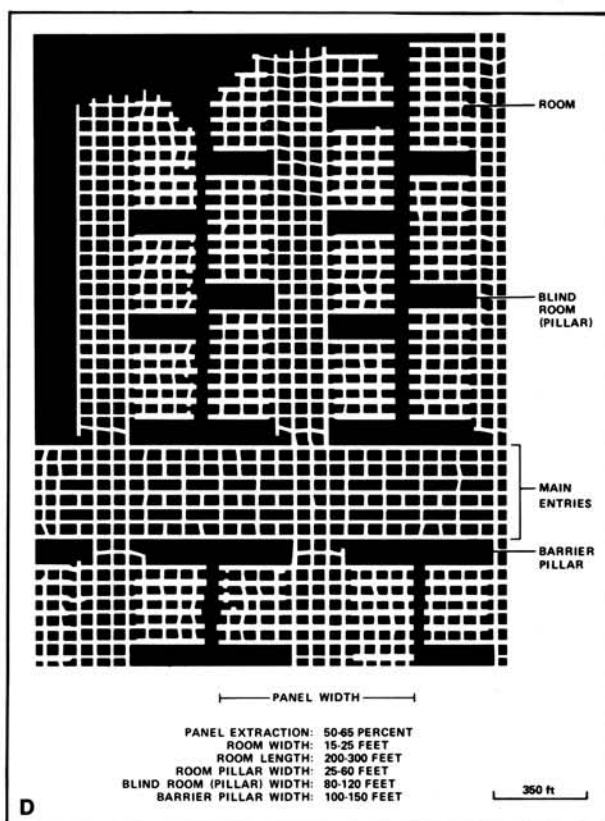
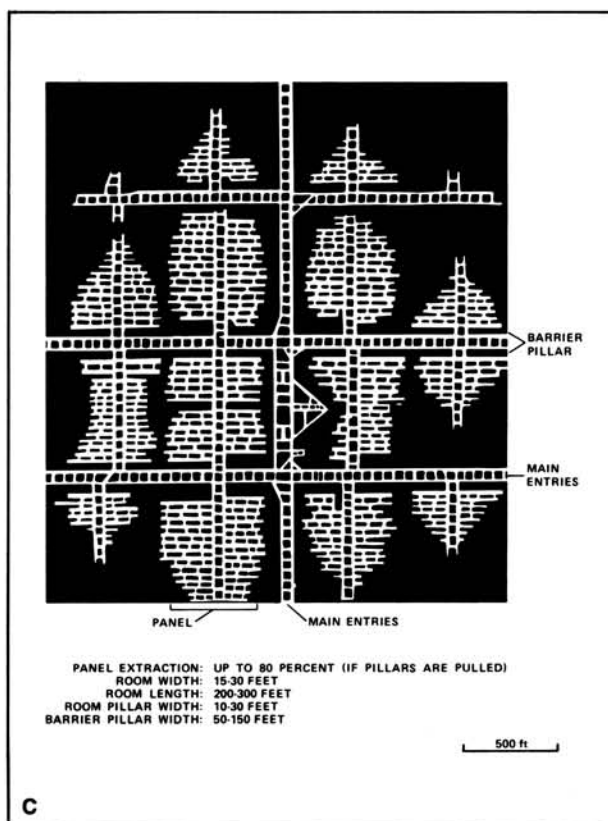
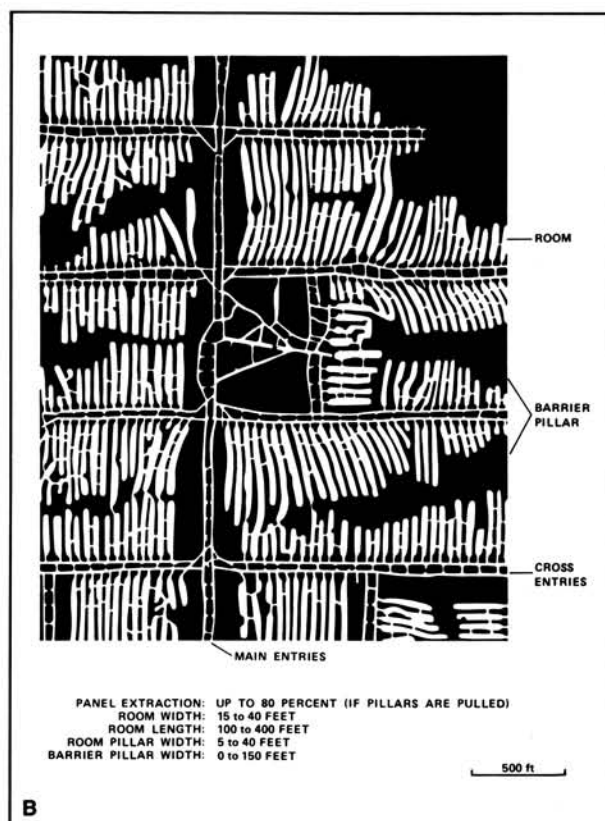
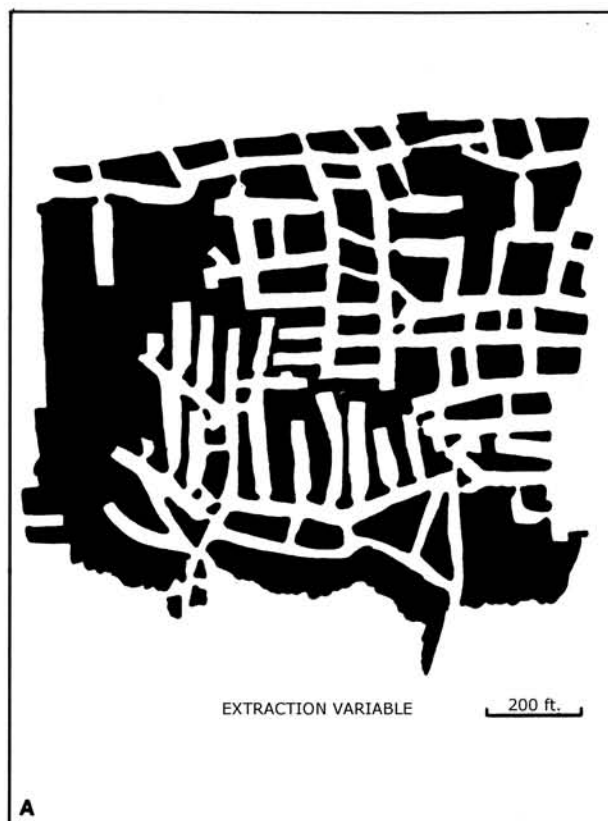


Figure 1 Mining methods: (A) room-and-pillar basic (RPB), (B) modified room and pillar (MRP), (C) room-and-pillar panel (RPP), (D) blind room and pillar (BRP).

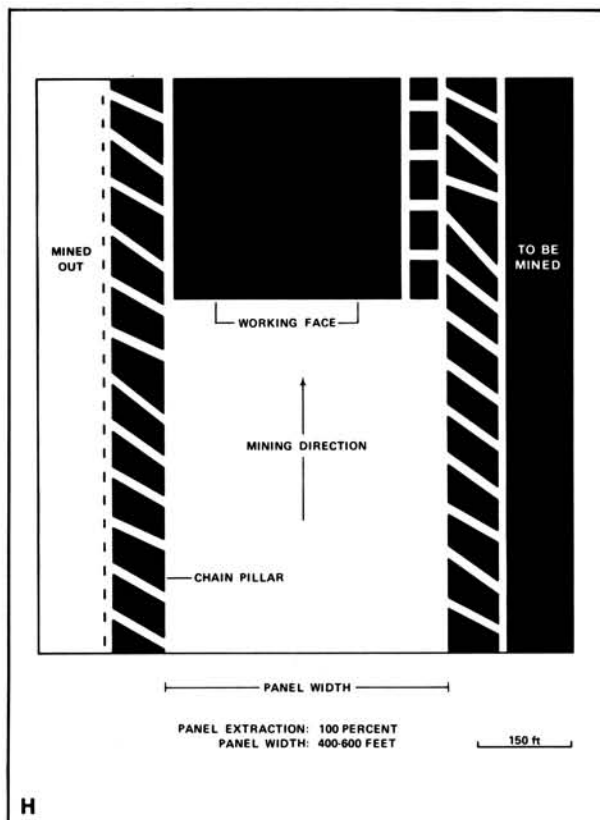
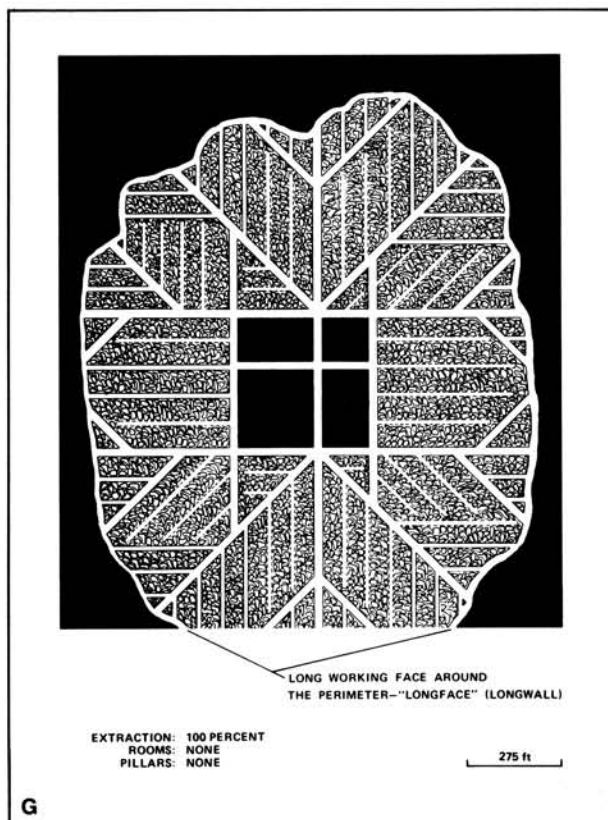
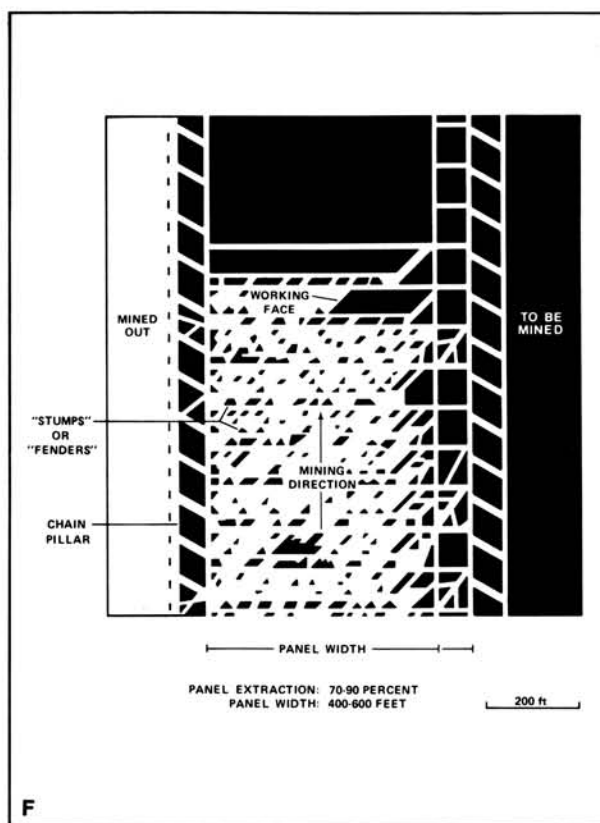
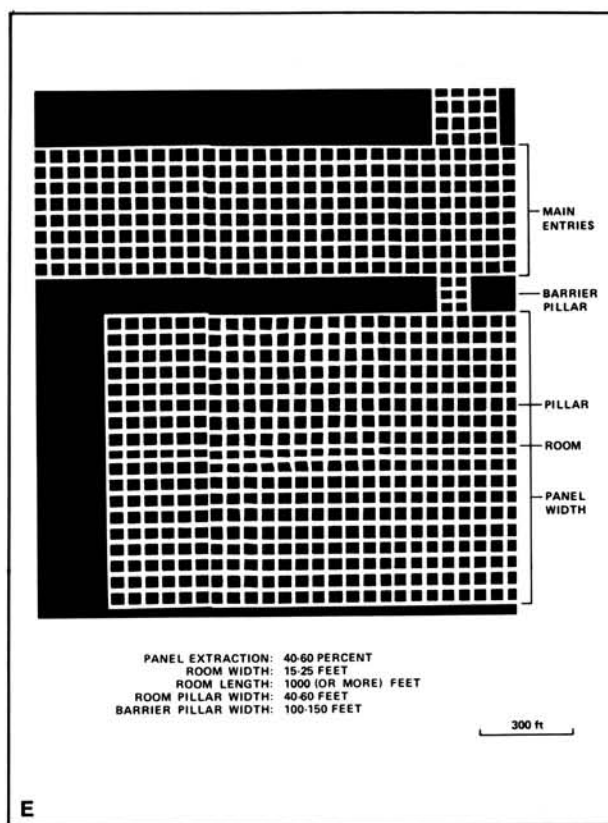


Figure 1 (cont.) Mining methods: (E) checkerboard room and pillar (CRP), (F) high extraction retreat (HER), (G) early (pre-1960) longwall, (H) post-1959 longwall

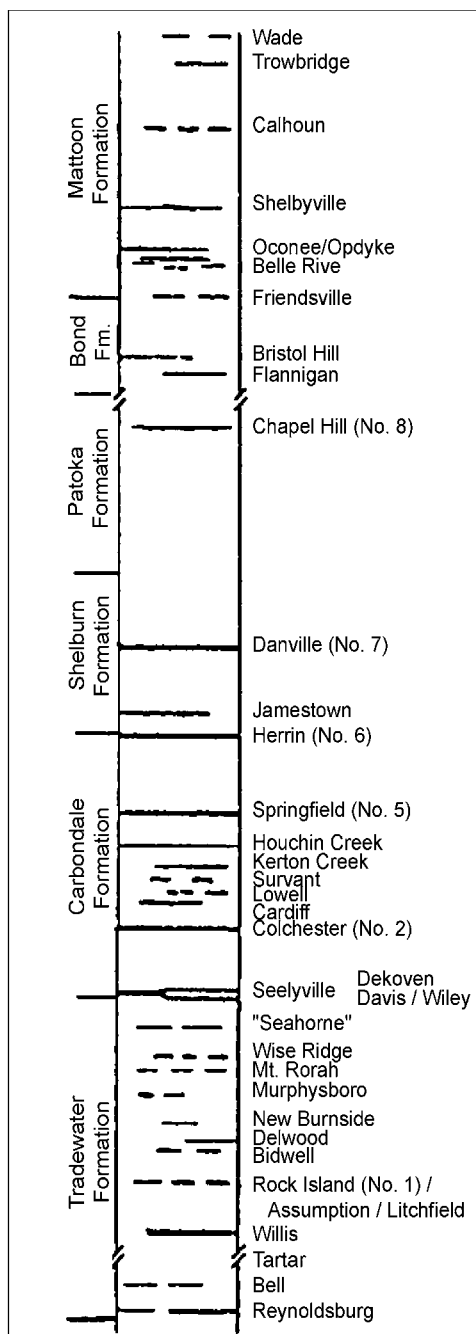


Figure 2 Generalized stratigraphic section, showing approximate vertical relations of coals in Illinois.

INTERPRETING A MINE SUMMARY SHEET

The mine summary sheet is arranged numerically by mine index number. Index numbers are shown on the map and in the mine listing. The mine summary sheet provides the following information (if available).

Company and mine name The last company or owner of the mine is used, unless no production was recorded for the last owner. In that case, the penultimate owner is listed. Mines often have no specific name; in these cases, the company name is also used as the mine name.

Type *Underground* denotes a subsurface mine in which the coal was reached through a shaft, slope, or a drift entry. *Surface* denotes a surface, open pit or strip mine.

Total mined-out acreage shown The total acreage of the mined area mapped, including any acreage mined on adjacent quadrangles, is calculated from the digitized outline of the mine. The acreage of large barrier pillars depicted on the map is excluded from the mined-out acreage. Small pillars not digitized are included in the acreage calculation. If the mine outline is not based on a final mine map, the acreage is followed by an estimate of additional acres that may have been mined. The estimate is determined from reported mine production, approximate thickness of the coal, and recovery rates calculated from nearby mines that used similar mining methods.

SHAFT, SLOPE, DRIFT OR TIPPLE LOCATIONS

Shaft, slope, drift, or tippie locations Locations of all known former entry points to underground mines or the location of coal cleaning, tippie, and shipping equipment used by the mine's facility are listed. The location is described in terms of county, township and range (Twp-Rge), section, and location within the section by quarters. NE SW NW, for instance, would describe the location in the northeast quarter of the southwest quarter of the northwest quarter. When sections are irregular in size, the quarters remain the same size and are oriented (or "registered") from the southeast corner of the section. Approximate footage from the section lines (FEL = from east line, FNL = from north line, for example) is given when that information is known; this indicates a surveyed location and is not derived from maps. Entry points are also plotted on the map and coded for the type of entry or tippie. A mine opening may have had many purposes during the life of the mine. Old hoist shafts are often later used for air and escape shafts; this information is included in the directory when known. The tippie for underground mines was generally located near the main shaft or slope. At surface mines, coal was sometimes hauled to a central tippie several miles from the mine pit.

GEOLOGY

Seam(s) mined The name of the coal seam(s) mined is listed, if known. If multiple seams were mined, they are all listed, although the mined-out area for each seam may be shown on separate maps. Figure 2 shows the stratigraphic section of the coal-bearing interval in Illinois, and the vertical relations among the coals.

Depth The depth to the top of the seam in the vicinity of the shaft is listed, if known. The depth is determined from notes made by geologists who visited the mine during its operation or from drill hole data in ISGS files. Depth generally varies little over the extent of a mine; however, reported depths for an individual mine may vary. Depth for surface-mined coals varies, and is usually represented as a range.

Thickness The approximate thickness of the mined seam is shown, if known. Thickness also comes from notes of geologists who visited the mine during its operation or from borehole data in ISGS files. Minimum, maximum, and average thicknesses are given when this information is available.

Mining method The principal mining method used at the mine (figs. 1A-H) is listed. See the mining methods section at the beginning of this directory for a discussion of this parameter.

Geologic problems reported Any known geologic problems, such as faults, water seepage, floor heaving, and unstable roof, encountered in the mine are reported. This information is from notes made by ISGS geologists who visited the mine, or from reports by mine inspectors published by the Illinois Department of Mines and Minerals, or from the source map(s). Geologic problems are not reported for active mines.

PRODUCTION HISTORY

Production history Tons of coal produced from the mine by each mine owner are totaled. When the source map used for the mine outline is not a final mine map, the tonnage produced since the date of the map is identified. For mines that extend into adjacent quadrangles, the tonnage reported includes areas mined in adjacent quadrangles.

SOURCE OF DATA

Source map This section lists information about the map(s) used to compile the mine outline and the locations of tipples and mine openings. In some cases more than one source map was used. For example, a map drawn before the mine closed may provide better information on original areas of the mine than a later map. When more than one map was used, the bibliography section explains what information was taken from each source.

Date The date of the most recent mine survey listed on the source map is reported.

Original scale The original scale of the source map is listed. Many maps are photo-reductions and are no longer at their original scale. The original scale gives some indication of the level of detail of the mine outline and the accuracy of the mine boundary relative to surface features. Generally, the larger the scale, the greater the accuracy and detail of the mine map. Mine outlines taken from source maps at scales smaller than 1:24,000 may be highly generalized and may well be inaccurately located with respect to surface features.

Digitized scale The scale of the digitized map is reported. The scale may be different from that of the original source map. In many cases the digitized map was made from a photo-reduction of the original source map, or the source map was not in a condition suitable for digitizing and the mine boundaries were transferred to another base map.

Map type Source maps are classified into five categories to indicate the probable completeness of the map. See discussion of source maps in the previous section.

Annotated bibliography Sources that provide information about the mine are listed, with the data taken from each source. Some commonly used sources are described below. Full bibliographic references are given for all other sources. Unless otherwise noted, all sources are available for public inspection at the ISGS.

Coal Reports Published since 1881, these reports contain tabular data on mine ownership, production, employment, and accidents. Some volumes include short descriptions made by mine inspectors of physical features and conditions in selected mines.

Directory of Illinois Coal Mines This source is a compilation of basic data about Illinois coal mines, originally gathered by ISGS staff in the early 1950s. Sources used for this directory are undocumented, but they are primarily Illinois Department of Mines and Minerals annual reports, ISGS mine notes, and coal company officials.

ENR Document 85/01, Guither, H. D., J. K. Hines, and R. A. Bauer, 1985 The Economic Effect of Underground Mining Upon Land Used for Illinois Agriculture: Illinois Department of Energy and Natural Resources Document 85/01, 185 p.

Microfilm map The U.S. Bureau of Mines maintains a microfilm archive of mine maps. A microfilm file for Illinois is available for public viewing at the ISGS.

Mine notes ISGS geologists have visited mines or contacted mine officials throughout the state since the early 1900s. Notes made during these visits range from brief descriptions of the mine location to long narratives (including sketches) of mining conditions and geology.

Federal Land Bank of St. Louis, Preliminary Reports on Subsidence Investigations Mining engineers working for the Federal Land Bank of St. Louis mapped areas of subsidence due to coal mining in the early 1930s. These reports often include county maps of mine properties with mined-out areas including shaft locations, as well as subsidence areas.

REFERENCES

Bauer, R. A., B. A. Trent, and P. B. Dumontelle, 1993, Mine Subsidence in Illinois: Facts for the Homeowner Considering Insurance, Illinois State Geological Survey, Environmental Geology Note 144, 16p.

Guither, H. D., J. K. Hines, and R. A. Bauer, 1985, The Economic Effects of Underground Mining Upon Land Used for Illinois Agriculture, Illinois Department of Energy and Natural Resources Document 85/01, 185p.

Worthen, A. H., H. M. Bannister, F. H. Bradley, & H. A. Green, 1870, Geology and Paleontology of Illinois, Volume IV, State Journal Steam Press, Springfield, Illinois, 508p.

PART II DIRECTORY OF MINES IN THE MINOOKA QUADRANGLE

MINE SUMMARY SHEETS

A summary sheet on the geology and production history of each mine in the Minooka Quadrangle is provided. These summary sheets are arranged numerically by mine index number. Consult Part I for a complete explanation of the data listed in the summary sheet.

Mine Index 625

Morris Coal & Mining Company, Morocco Mine

Type: Surface Total mined-out acreage shown: 422 Production indicates approximately 260 acres were mined. Part of the discrepancy is because numerous other mines (both surface and underground) took coal from the area encompassed by the outline of this mine.

SHAFT, SLOPE, DRIFT or TIPPLE LOCATIONS

Type	County	Township-Range	Section	Quarters-Footage
Tipple / pit	Grundy	34N 7E	34	NW NW SW
Pits	Grundy	34N 7E	25, 26, 33, 34, 35	

GEOLOGY

Seam(s) Mined	Depth (ft)	Thickness (ft)			Mining Method
		Min	Max	Ave	
Colchester	15-22			2.3-2.7	Surface

Geologic Problems Reported: The coal contained fusain partings and pyrite lenses.

PRODUCTION HISTORY

Company	Mine Name	Years	Production (tons)
Morris Coal & Mining Company	Morocco; Morris No. 2	1932-1954	<u>1,034,802</u> 1,034,802

Last reported production: June 1954

SOURCES OF DATA

Source Map	Date	Original Scale	Digitized Scale	Map Type
Company, 4103.G72 i5.1-6	12-31-1942	1:31680	1:31680	Not final
USGS topographic map	1953	1:24000	1:24000	Secondary source

Annotated Bibliography (data source, brief description of information)

Coal Reports - Production, ownership, years of operation, mining method.

Directory of Illinois Coal Mines (Grundy County) - Mine names, mine index, ownership, years of operation.

Mine notes (Grundy County) - Mine type, mine location, seam, depth, thickness, geologic problems.

Company map, ISGS map library, 4103.G72 i5.1-6 - Mine outline, mining method.

USGS 7.5-minute topographic map, Lisbon Quadrangle, 1953 - Mine outline.

Mine Index 2391**Northwestern Coal Corporation, Morris Mine**

Type: Surface Total mined-out acreage shown: 331 The reported production indicates approximately 140 acres were mined. Part of the discrepancy is because numerous other mines (both surface and underground) also took coal from the areas encompassed within the outline of this mine.

SHAFT, SLOPE, DRIFT or TIPPLE LOCATIONS

Type	County	Township-Range	Section	Quarters-Footage
Tipple / pit	Grundy	34N 7E	35	NE NW SW
Pit	Grundy	34N 7E	25, 27, 34, 35	

GEOLOGY

Seam(s) Mined	Depth (ft)	Thickness (ft)			Mining Method
		Min	Max	Ave	
Colchester	16-26			2.2-2.5	Surface

Geologic Problems Reported:

PRODUCTION HISTORY

Company	Mine Name	Years	Production (tons)
Northwestern Coal Corporation	Morris	1945-1949	576,236
			576,236

Last reported production: May 1949

SOURCES OF DATA

Source Map	Date	Original Scale	Digitized Scale	Map Type
Microfilm, document 351476	7-1-1949	1:4800	1:9269	Final
USGS topographic map	1953	1:24000	1:24000	Secondary source

Annotated Bibliography (data source, brief description of information)

Coal Reports - Production, ownership, years of operation, depth, thickness, mining method.

Directory of Illinois Coal Mines (Grundy County) - Mine names, mine index, ownership, years of operation.

Mine notes (Grundy County) - Mine type, mine location, seam.

Microfilm map, document 351476, reel 03136, frame 222 - Mine outline, mining method.

USGS 7.5-minute topographic map, Morris Quadrangle, 1953 - Mine outline.

OTHER MINES SHOWN ON MINOOKA QUADRANGLE

Mine Index 3195, Petty Mine SE 19-T34N-R8E, shaft, 5.0-6.0 feet thick source: Worthen et al. (1870)
 Mine Index 5465 SW NW SE 25-T34N-R7E source: 1874 Atlas of Grundy County
 Mine Index 5508 SE NE SW 19-T34N-R8E source: ISGS Bulletin 43, Plate 3 (1919)
 Mine Index 5509 NW SE SW 19-T34N-R8E source: ISGS Bulletin 43, Plate 3 (1919)
 Mine Index 5525 SE SW NE 25-T34N-R7E UG LW source: Federal Land Bank Report

MINES WHOSE LOCATIONS ARE NOT KNOWN, MINOOKA QUADRANGLE

The locations of the following mines are unknown, but the production tonnage, operating names, and nearest town were reported in the Annual Coal Reports. The operators listed below mined in or near the Minooka Quadrangle. The information shown is similar to that presented on the summary sheets in the previous pages of this directory. The first item is the name the mine operated under as listed in the Coal Report, then the years the mine reported. If no physical data are available, the next item listed is the total tons produced by the mine. If physical data are available, the order of presentation is as follows: type of opening for the mine (drift, slope or shaft), depth of coal in feet, and thickness of coal in feet.

The total tons mined by these unlocated mines is 89, (89,000 underground and 900 surface mined), which would represent approximately 30 to 45 acres, depending on the recovery factor, mining method, and numerous other factors. (Note: 1 square mile = 640 acres)

COAL CITY OR CARBON HILL

Goose Lake Coal Company, 1934-1936, underground	5,216 tons
---	------------

MORRIS

Telfer (Alex W.) & Son, 1894-1899, shaft, Colchester, 66, 2.5-2.67, RP	11,654 tons	Mine Index 5433
Thurson (Lars), 1884-1890, shaft, Colchester, 48-60, 2.5-3.0, RP	4,863 tons	Mine Index 5434
Thurston (Thomas L.), 1890-1894	2,725 tons	
Garritty (Thomas), 1894-1895	<u>918 tons</u>	
	8,506 tons	
Kay (Harry), No 1 Mine, 1889-1897, shaft, Colchester, 80, 3.0-3.5, RP	11,739 tons	Mine Index 5435
Nelson (John F.), 1887-1891, shaft, Colchester, 60, 3.0, RP	2,140 tons	Mine Index 5438
Cryer & Wren, 1887-1888, shaft, Colchester, 60, 2.5, RP	1,000 tons	Mine Index 5439
Wren (George), 1888-1892	<u>4,650 tons</u>	
	5,650 tons	
Cummings (James), 1884-1885, shaft, Colchester, 25, 3.0, RP	650 tons	Mine Index 5440
Hornsby (William), 1884-1889, shaft, Colchester, 40, 3.0, RP	3,194 tons	Mine Index 5441
Walsh (Thomas), 1884-1889, shaft, Colchester, 25, 3.0, RP	3,445 tons	Mine Index 5442
Martin (Lee), 1884-1889, shaft, Colchester, 36, 3.0, RP	5,059 tons	Mine Index 5443
Ferguson (William), 1884-1885, shaft, Colchester, 32, 3.0, RP	600 tons	Mine Index 5444
Bell (Alexander), 1884-1893, shaft, Colchester, 25-40, 2.33-3.0, RP	4,192 tons	Mine Index 5445
Yates (James), 1882-1883, shaft, Colchester, 47, 3.0	420 tons	Mine Index 5447
Olendorf Mine, 1882-1883, shaft, Colchester, —, 2.5	360 tons	Mine Index 5449

Erickson (John), 1882-1883, shaft, Colchester, 36, 2.5	720 tons	Mine Index 5450
McBride (N.), 1878-1883, shaft, Colchester, 50-52, 2.5-3.0	2,768 tons	Mine Index 5451
Gorich (J.), 1878-1879, shaft, Colchester, 50, 3.0	300 tons	Mine Index 5452
Steele (John), 1878-1879, shaft, Colchester, 40-53, 3.0, RP	1,500 tons	Mine Index 5453
Steele (George), 1881-1883	1,800 tons	
Steele (John), 1884-1885	<u>250 tons</u>	
	3,550 tons	
Cronin Brothers, 1881-1883, shaft, Colchester, 62-63, 2.75	2,370 tons	Mine index 5454
Mallory & Ross, 1878-1879, shaft, Colchester, 46-50, 2.5-3.0	1,000 tons	Mine Index 5455
Ross (Thomas H.), 1881-1883	<u>8,100 tons</u>	
	9,100 tons	
Erickson (Thomas), 1885-1886, shaft, Colchester, 35, 3.0, RP	840 tons	Mine Index 6740
Roakes Mine, 1878-1879, shaft, Colchester, 50, 3.0	300 tons	Mine Index 6741
Pratt (Mrs.), 1878-1879, shaft, Colchester, 20, 3.0	1,000 tons	Mine Index 6742
Tasdall (Henry), 1905-1908, shaft, Colchester, 100-105, 2.33-2.67, RP	2,922 tons	Mine Index 6743
Goode Brothers, 1891-1892, shaft, Colchester, 40, 2.5, RP	45 tons	
Telfer (John), 1898-1902, shaft, Colchester, 20, 2.67, RP	2,260 tons	
Enbody Coal Company, 1936-1936, Colchester, surface	900 tons	

INDEX OF MINES IN THE MINOOKA QUADRANGLE

Adams (Micajah)	1
Bell (Alexander)	11
Cronin Brothers	12
Cryer & Wren	11
Cummings (James)	11
Enbody Coal Company	12
Erickson (John)	12
Erickson (Thomas)	12
Ferguson (William)	11
Garrity (Thomas)	11
Goode Brothers	12
Goose Lake Coal Company	11
Gorich (J.)	12
Hornsby (William)	11
Kay (Harry)	11
Mallory & Ross	12
Martin (Lee)	11
McBride (N.)	12
Morocco Mine	9
Morris Coal & Mining Company, No. 2 Mine	9
Morris Mine	10
Nelson (John F.)	11
Northwestern Coal Corporation	10
Olendorf Mine	11
Petty Mine	11
Pratt (Mrs.)	12
Roakes Mine	12
Ross (Mallory & Ross)	12
Ross (Thomas H.)	12
Steele (George)	12
Steele (John)	12
Tasdall (Henry)	12
Telfer (Alex W.) & Son	11
Telfer (John)	12
Thurson (Lars)	11
Thurston (Thomas L.)	11
Walsh (Thomas)	11
Wren (Cryer & Wren)	11
Wren (George)	11
Yates (James)	11

Funding for this project was supplied by the Illinois Department of Transportation.