

Coal Mines in Illinois Waltersburg Quadrangle Pope County, Illinois

This map accompanies the Coal Mines Directory for the Waltersburg Quadrangle. Consult the directory for a complete explanation of the information shown on this map.

Mining Method

- Room & Pillar (RP)
- Room & Pillar Basic (RPB)
- Modified Room & Pillar (MRP)
- Room & Pillar Panel (RPP)
- Blind Room & Pillar (BRP)
- Checkerboard Room & Pillar (CRP)
- High Extraction Retreat (HER)
- Longwall (LW)
- Underground, Method Unknown
- Strip Mine
- Auger Mine
- General Area of Mining

Source of Mine Outline

- Final Mine Map
- Not Final Mine Map
- Undated Mine Map
- Incomplete Mine Map
- Secondary Source Map

Tipple, Shaft, Slope, Drift Locations

- Strip Mine Tipple - Active
- Strip Mine Tipple - Abandoned
- Mine Shaft - Active
- Mine Shaft - Abandoned
- Mine Slope - Active
- Mine Slope - Abandoned
- Mine Drift - Active
- Mine Drift - Abandoned
- Air Shaft
- Uncertain Location
- Uncertain Type of Opening

Mine Annotation (space permitting)

Company
Mine Name
ISGS Index No., Years of Operation

Other Areas Depicted

- Non-Coal Mines

Other Points Depicted

- Non-Coal Mines

Location



Disclaimer

Please check the Coal Section at the Illinois State Geological Survey's web site at <http://www.isgs.illinois.edu> for the most up-to-date version of these products.

Note that each quadrangle scale mined-out area map requires the use of the associated text directory for full explanation of map features and mine attributes. Also note that some quadrangles have multiple seams of mining and therefore more than one map may be available for a particular quadrangle. Please take care to check for multiple maps, as extensive mining may exist in the other seams.

The maps and digital files used for these studies were compiled from data obtained from a variety of public and private sources and have varying degrees of completeness and accuracy. This compilation map presents reasonable interpretation of the geology of the area and is based on available data. Locations of some mine features may be offset by 500 feet or more due to errors in the original source maps, the compilation process, digitizing, or a combination of these factors. These data are not intended for use in site-specific screening or decision-making. Use of these documents does not eliminate the need for detailed studies to fully understand the geology of a specific site. The Illinois State Geological Survey, Prairie Research Institute, or the University of Illinois make no guarantee, expressed or implied, regarding the correctness of the interpretations presented in this data set and accept no liability for the consequences of decisions made by others on the basis of the information presented here.

These maps were designed for use at 1:24,000. Enlarging the map may reduce accuracy, as the original scale of the source maps used to compile the outlines shown varies from 1:400 to 1:150,000, and some mine locations are known only from text descriptions. See the accompanying mine directory for the original scale of the source map used for a specific mine to check accuracy of a given portion of the map. Areas with no mines shown may still be undermined; see the unlocated mines list at the back of each mine directory.

The image of the U.S.G.S. topographic base map was projected from the original UTM to Lambert Conformal Conic.

ILLINOIS
UNIVERSITY OF ILLINOIS AT URBANA-CHAMPAIGN

ILLINOIS STATE
GEOLOGICAL SURVEY
PRAIRIE RESEARCH INSTITUTE

Prairie Research Institute
Illinois State Geological Survey
615 E. Peabody Dr.
Champaign, IL 61820

Mine Outlines Compiled by
Jennifer M. Obrad

June 2014, updated June 2016

DIRECTORY OF COAL MINES IN ILLINOIS

7.5-MINUTE QUADRANGLE SERIES

WALTERSBURG QUADRANGLE

POPE COUNTY

Jennifer M. Obrad & C. Chenoweth



2010, revised 2016

Institute of Natural Resource Sustainability
William W. Shilts, Executive Director
ILLINOIS STATE GEOLOGICAL SURVEY
E. Donald McKay III, Director

Natural Resources Building
615 East Peabody Drive
Champaign, Illinois 61820

Phone 217-244-4610
Fax 217-333-2830



This material is based upon work supported by the Illinois Department of Transportation. Any opinions, findings, and conclusions or recommendations expressed in this publication are those of the authors and do not necessarily reflect the views of the Illinois Department of Transportation.

Cover photo Track-mounted duckbill loading machine at a Peabody Coal Company mine, ca. 1915.

DISCLAIMER: The accuracy and completeness of mine maps and directories vary with the availability of reliable information. Maps and other information used to compile this mine map and directory were obtained from a variety of sources and the accuracy of some of the original information cannot be verified. Consequently, the Illinois State Geological Survey (ISGS) cannot guarantee the mine maps are free of errors and disclaims any responsibility for damages that may result from actions or decisions based on them.

The ISGS updates the maps and directories periodically, and welcomes any new information or corrections. Please contact the Coal Section of the ISGS at the address shown on the title page of this directory, or telephone (217) 244-4610.

© 2010 The Board of Trustees of the University of Illinois. All rights reserved.
For permission information, contact the Illinois State Geological Survey.

CONTENTS

INTRODUCTION	1
MINING IN THE WALTERSBURG QUADRANGLE	1
PART I EXPLANATION OF MAP AND MINE SUMMARY SHEET	2
INTERPRETING THE MAP	2
Mine Type and Mining Method	2
Source Maps	3
Points and Labels	3
INTERPRETING A MINE SUMMARY SHEET	6
REFERENCES	8
PART II DIRECTORY OF MINES IN THE WALTERSBURG QUADRANGLE	9
MINE SUMMARY SHEETS	9
Mine Index 776	
Samuel Sistler & Son, Sistler Mine	9
Mine Index 913	
Mt. Zion Mining Corporation, Mt. Zion Mine	10
Mine Index 936	
Western Mining, Incorporated, Shawnee Mine	11
Mine Index 984	
Bill V. Martin Mining Corporation, Rock Mine	12
OTHER MINES SHOWN ON WALTERSBURG QUADRANGLE	13
Mine Index 2069	13
Mine Index 2172	13
Mine Index 2296	13
Mine Index 2343	13
Mine Index 2433	13
Mine Index 2479	13
Mine Index 2534	13
Mine Index 2754	13
Mine Index 4186	13
Mine Index 4838	13
NON-COAL MINES IN THE WALTERSBURG QUADRANGLE	13
Scott Fluorspar & Lead Mine	13
Pittsburg Mine	13
McClellan Fluorspar Mine	14
Clay Mines	14
Luella Fluorspar & Clay Mine	14
Moore Fluorspar & Lead Mine	15
Pierce & Kerr Mine	15
Pope-Hardin Mining Company	15
MINES WHOSE LOCATIONS ARE NOT KNOWN, WALTERSBURG QUADRANGLE	16
INDEX OF MINES IN THE WALTERSBURG QUADRANGLE	17

INTRODUCTION

Coal has been mined in 76 counties of Illinois. More than 7,400 coal mines have operated since commercial mining began in Illinois about 1810; fewer than 30 are currently active. To detail the extent and location of coal mining in Illinois, the Illinois State Geological Survey (ISGS) has compiled maps and directories of known coal mines. The ISGS offers maps at a scale of 1:100,000 and accompanying directories for each county in which coal mining is known to have occurred. Maps at a scale of 1:24,000 and accompanying directories, such as this, are available for selected quadrangles. Contact the ISGS for a list of these quadrangles.

These larger scale maps show the approximate positions of mines in relation to surface features such as roads and water bodies, and indicate the mining method used and the accuracy of the mine boundaries. The maps are useful for locating mine boundaries relative to specific properties and for assessing the potential for subsidence in an area. Mine boundaries compiled from final mine surveys are generally shown within 200 feet of their true position. As a result of poor cartographic quality and inaccuracies in the original mine surveys, boundaries of some older mines may be mislocated on the map by 500 feet or more. Original mine maps should be consulted in situations that require precise delineation of mine boundaries or internal workings of mined areas.

This directory serves as a key to the accompanying mine map and provides basic information on the coal mines in the quadrangle. The directory is composed of two parts. Part I explains the symbols and patterns used on the accompanying map and the summary data presented for each mine. Part II numerically lists the mines in the quadrangle and summarizes the geology and production history of each mine. Total production for the mine, not the portion in the quadrangle, is given.

MINING IN THE WALTERSBURG QUADRANGLE

The coal mined in the Waltersburg Quadrangle was deposited in lenticular pods, unlike the large sheet-like deposits that make up the Herrin and Springfield reserves. The coal ranged up to 3 feet thick, and was often shallow enough to mine from the surface. Most of the mines operated only a few years, and none mined more than a few acres.

Fluorspar mining took place in this area as well as clay mining. The clay was similar to kaolin and could be used for ceramic purposes, such as pottery and stoneware. The clay was mined between 1866 and 1906, and reserves of the clay remain.

PART I EXPLANATION OF MAP AND MINE SUMMARY SHEET

INTERPRETING THE MAP

The map accompanying this directory shows the location of coal mines known to be present in the quadrangle. The map, corresponding to a U.S. Geological Survey (USGS) 7.5-minute quadrangle, covers an area bounded by lines of latitude and longitude 7.5-minutes apart. In Illinois, a quadrangle is approximately 6.5 miles east to west and 8.5 miles north to south, an area of about 56 square miles. The USGS generally offers one map of mines per quadrangle. In some areas where extensive mining occurred in two or more overlapping seams, separate maps are compiled for mines in each seam to maintain readability of the map.

Mine Type and Mining Method

The mine type is indicated on the map by pattern color: green represents surface mines; red and yellow represent underground mines. The red patterns are used for areas of underground mining that are documented by a primary or secondary source map. A yellow pattern is used for cases where no map of the mine workings is available, but a general area of mining can be inferred from property maps or production figures. The patterns indicate the main mining methods used in underground mines. The methods are (1) room and pillar and (2) high extraction. The method used gives some indication of the amount and pattern of coal extraction within each mined area, and has some influence on the timing and type of subsidence that can occur over a mine.

The following discussion and illustrations of mining methods are based on Guither et al. (1984).

In room-and-pillar mines, coal is removed from haulage-ways (entries) and selected areas called rooms. Pillars of unmined coal are left between the rooms to support the roof. Depending on the size of rooms and pillars, the amount of coal removed from the production areas will range from 40% to 70%.

Room and Pillar - mining is divided into six categories:

- room-and-pillar basic (RPB, fig. 1A), an early method that did not follow a preset mining plan and therefore resulted in very irregular designs;
- modified room and pillar (MRP, fig. 1B);
- room-and-pillar panel (RPP, fig. 1C);
- blind room and pillar (BRP, fig. 1D);
- checkerboard room and pillar (CRP, fig. 1E);
- room and pillar (RP), a classification used when the specific type of room-and-pillar mining is unknown.

Blind and checkerboard are the most common types of room-and-pillar mining used in Illinois today. The knowledge of room-and-pillar mining methods gives a trained engineer information on the nature of subsidence that may occur. A more extensive discussion of subsidence can be found in Bauer et al. (1993).

High-extraction These mining methods are subdivided into high-extraction retreat (HER, Fig 1F) and longwall (LW, Fig 1G, 1H). In these methods, much of the coal is removed within well defined areas of the mine. Subsidence of the surface above these areas occurs within weeks. Once the subsidence activity ceases, the potential for further movement over these areas is low; however, subsidence may continue for several years after mining.

High-extraction retreat mining is a form of room-and-pillar mining that extracts most of the coal. Rooms and pillars are developed in the panels, and the pillars are then systematically removed (fig. 1F).

In early (pre-1960) longwall mines, mining advanced in multiple directions from a central shaft (fig. 1G). Large pillars of coal were left around the shaft, but all coal was removed beyond these pillars. Miners placed rock and wooden props and cribs in the mined-out areas to support the mine roof. The overlying rock gradually settled onto these supports, thus producing subsidence at the surface. In post-1959 longwall mines, room-and-pillar methods have been used to develop the main entries of the mine and panel areas. Modern longwall methods extract 100 percent of the coal in the panel areas (fig. 1H).

SOURCE MAPS

Mine outlines depicted on the map are, whenever possible, based on maps made from original mine surveys. The process of compiling and digitizing the quadrangle map may produce errors of less than 200 feet in the location of mine boundaries. Larger errors of 500 feet or more are possible for mines that have incomplete or inaccurate source maps.

Because of the extreme complexity of some mine maps, detailed features of mined areas have been omitted. The digitized mine boundary includes the exterior boundary of all rooms or entries that were at least 80 feet wide or protruded 500 feet from the main mining area. Unmined areas between mines are shown if they are at least 80 feet wide; unmined blocks of coal within mines are shown if they are at least 400 feet on each side. Original source maps should be consulted when precise information on mine boundaries or interior features is needed.

The mine summary sheet lists the source maps used to determine each mine outline. The completeness of map sources is indicated on the map by a line symbol at the mine boundary. Source maps are organized in five categories.

Final mine map The mine outline was digitized from an original map made from mine surveys conducted within a few months after production ceased. The date of the map and the last reported production are listed on the summary sheet.

Not a final map The mine is currently active or the mine outline was made from a map based on mine surveys conducted more than a few months before production ceased. This implies the actual mined-out area is probably larger than the outline on the map. The mine summary sheet indicated the dates of source maps and the last reported production, as well as the approximate tonnage mined between these two dates (if the mine is abandoned). The summary sheet also lists the approximate acreage mined since the date of the map and, in some cases, indicates the area where additional mining may have taken place. This latter information is determined by locating on the map the active faces relative to probable boundaries of the mine property.

Undated map The source map was undated, so it may or may not be based on a final mine survey. When sufficient data are available, the probable acreage of the mined area is estimated from reported production, average seam thickness and a recovery rate comparable to other mines in the area. This information is listed in the summary sheet for the mine.

Incomplete map The source map did not show the entire mine. The summary sheet indicates the missing part of the mine map and the acreage of the unmapped area, which is estimated from the amount of coal known to have been produced from the mine.

Secondary source map The original mine map was not found so the outline shown was determined from secondary sources (e.g., outlines from small-scale regional maps published in other reports). The summary sheet describes the secondary sources.

POINTS AND LABELS

The locations of all known mine openings (shafts, slopes, and drifts) and surface mine tipples are plotted on the map. Tipples are areas where coal was cleaned, stockpiled, and loaded for shipping.

Only openings or tipples are plotted for mines without source maps. If the precise locations of these features are unknown, a special symbol is used to indicate the approximate location of the mine.

Each mine on the map is labeled with the names of the mine and operating company, ISGS mine index number, and years of operation (if known) if space permits. A seam designation is given on maps where more than one seam was mined. For a mine that operated under more than one name, only the most recent name is generally given. When a mine changed names or ownership shortly before closing, an earlier name is listed. All company and mine names are listed on the mine summary sheet in the directory, under the production history segment.

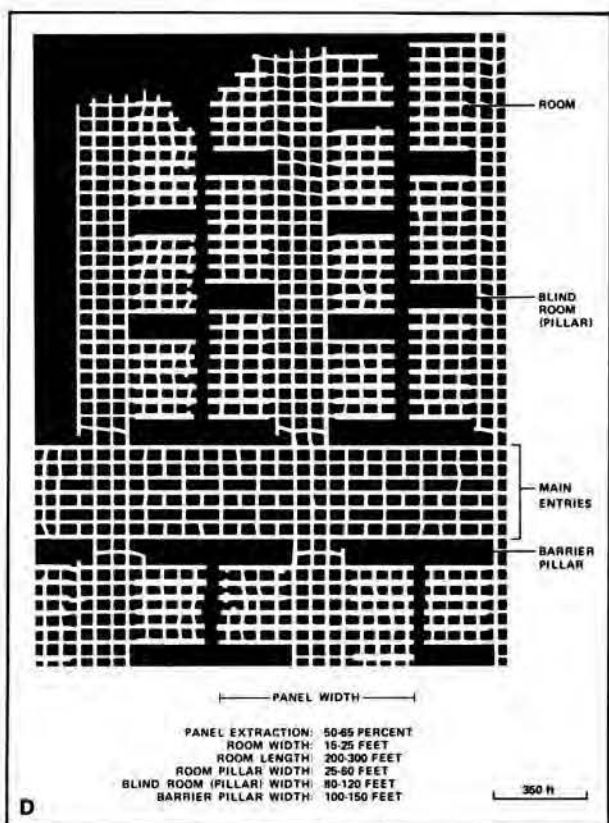
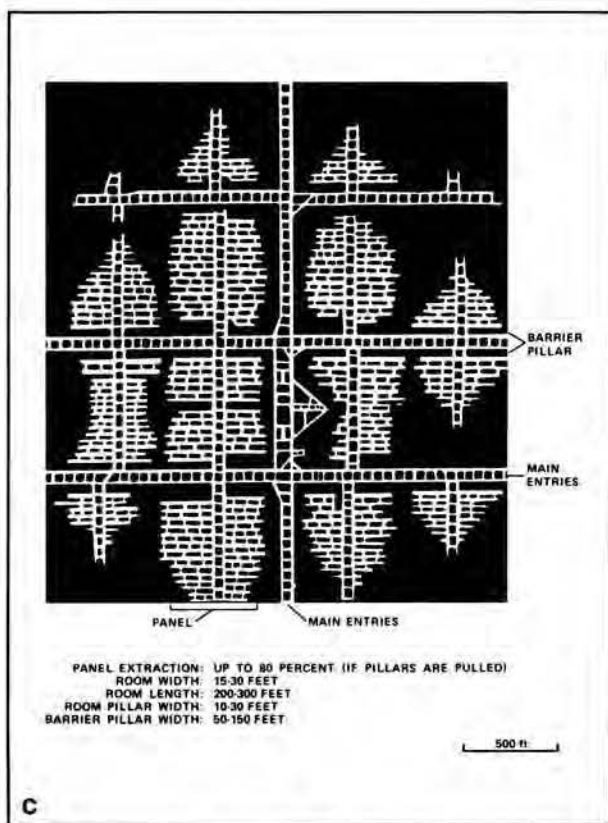
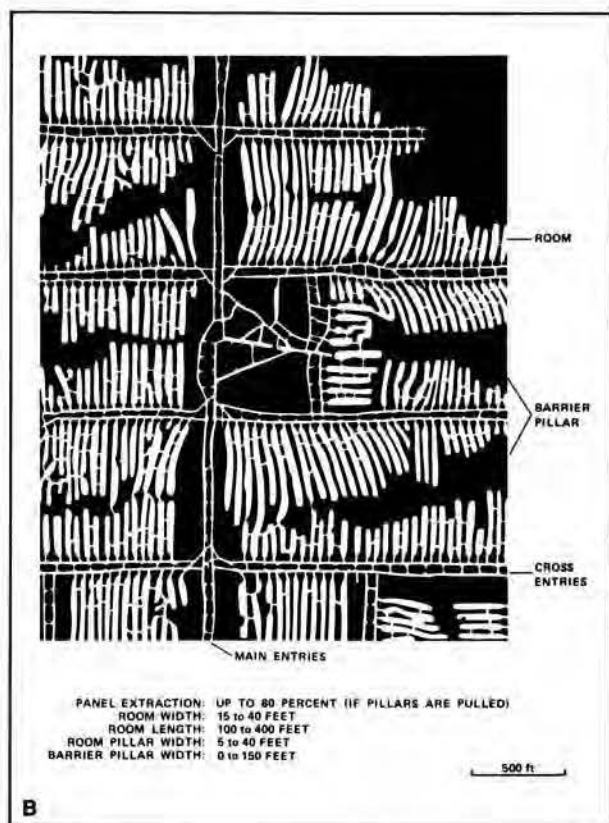
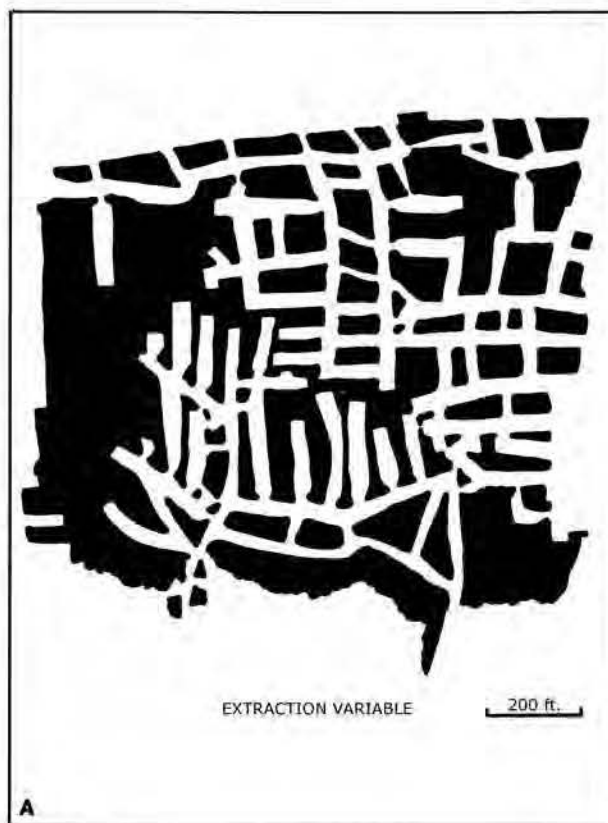


Figure 1 Mining methods: (A) room-and-pillar basic (RPB), (B) modified room and pillar (MRP), (C) room-and-pillar panel (RPP), (D) blind room and pillar (BRP).

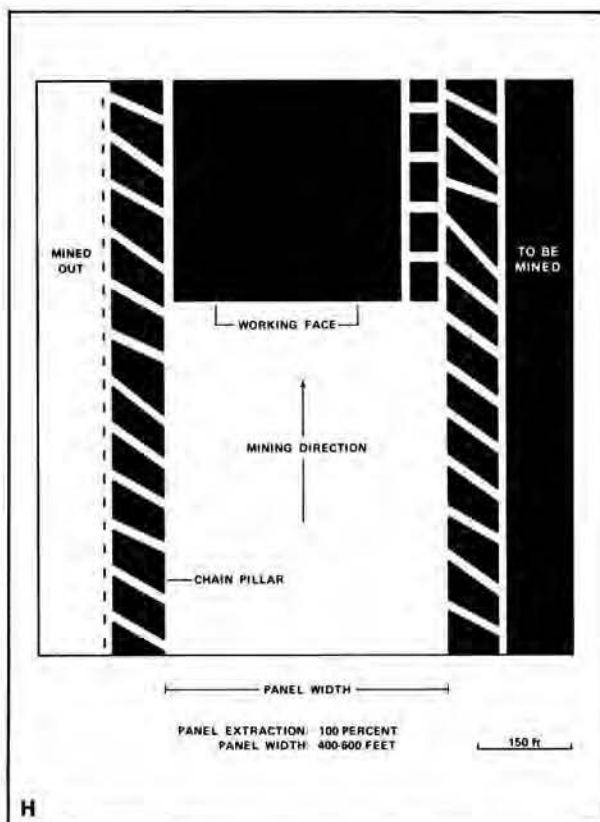
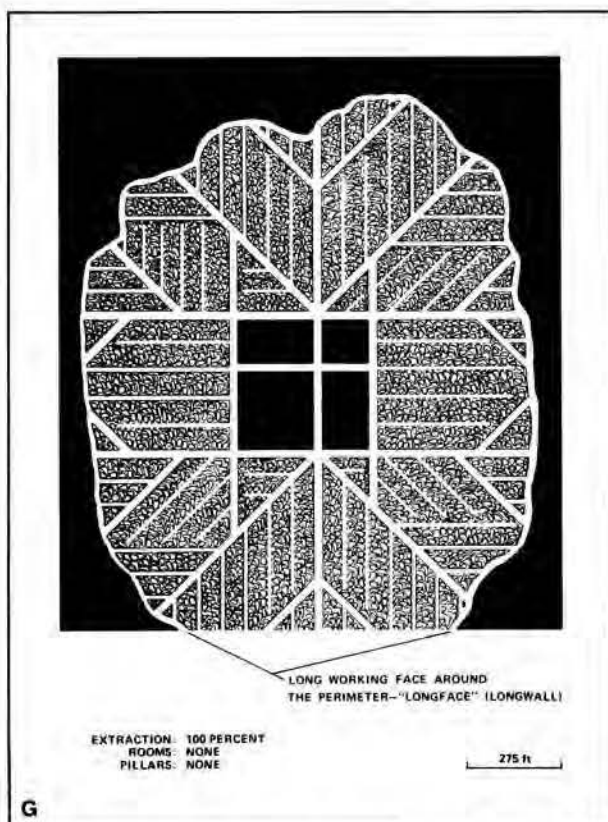
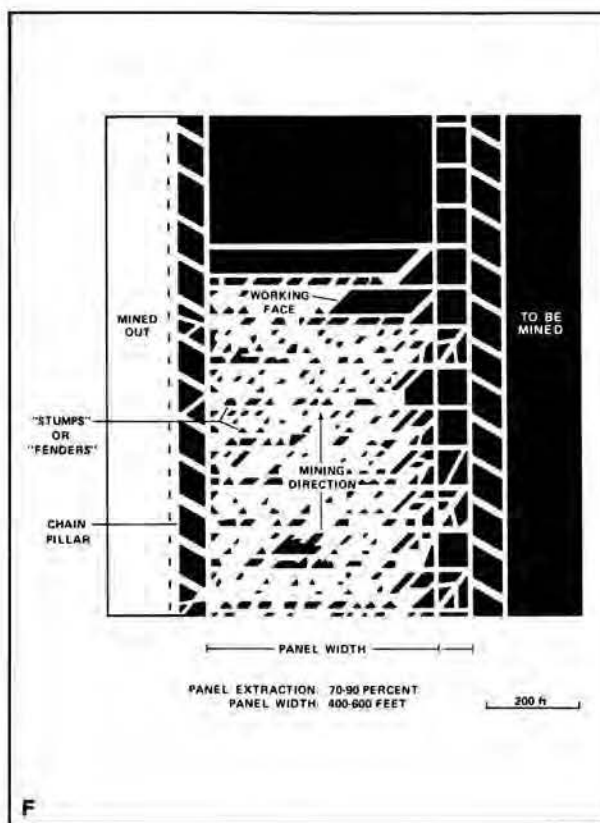
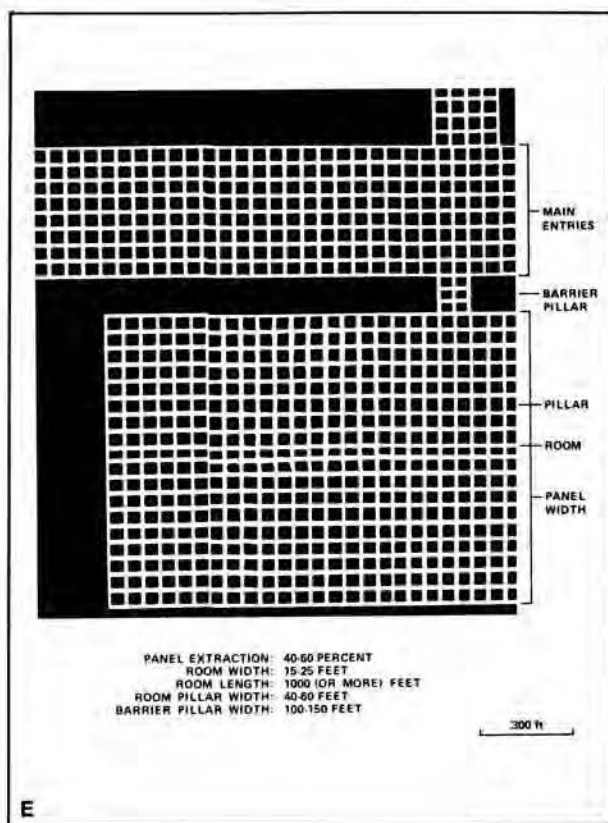


Figure 1 (cont.) Mining methods: (E) checkerboard room and pillar (CRP), (F) high extraction retreat (HER), (G) early (pre-1960) longwall, (H) post-1959 longwall



Figure 2 Generalized stratigraphic section, showing approximate vertical relations of coals in Illinois.

INTERPRETING A MINE SUMMARY SHEET

The mine summary sheet is arranged numerically by mine index number. Index numbers are shown on the map and in the mine listing. The mine summary sheet provides the following information (if available).

Company and mine name The last company or owner of the mine is used, unless no production was recorded for the last owner. In that case, the penultimate owner is listed. Mines often have no specific name; in these cases, the company name is also used as the mine name.

Type *Underground* denotes a subsurface mine in which the coal was reached through a shaft, slope, or a drift entry. *Surface* denotes a surface, open pit or strip mine.

Total mined-out acreage shown The total acreage of the mined area mapped, including any acreage mined on adjacent quadrangles, is calculated from the digitized outline of the mine. The acreage of large barrier pillars depicted on the map is excluded from the mined-out acreage. Small pillars not digitized are included in the acreage calculation. If the mine outline is not based on a final mine map, the acreage is followed by an estimate of additional acres that may have been mined. The estimate is determined from reported mine production, approximate thickness of the coal, and recovery rates calculated from nearby mines that used similar mining methods.

SHAFT, SLOPE, DRIFT OR TIPPLE LOCATIONS

Shaft, slope, drift, or tippie locations Locations of all known former entry points to underground mines or the location of coal cleaning, tippie, and shipping equipment used by the mine's facility are listed. The location is described in terms of county, township and range (Twp-Rge), section, and location within the section by quarters. NE SW NW, for instance, would describe the location in the northeast quarter of the southwest quarter of the northwest quarter. When sections are irregular in size, the quarters remain the same size and are oriented (or "registered") from the southeast corner of the section. Approximate footage from the section lines (FEL = from east line, FNL = from north line, for example) is given when that information is known; this indicates a surveyed location and is not derived from maps. Entry points are also plotted on the map and coded for the type of entry or tippie. A mine opening may have had many purposes during the life of the mine. Old hoist shafts are often later used for air and escape shafts; this information is included in the directory when known. The tippie for underground mines was generally located near the main shaft or slope. At surface mines, coal was sometimes hauled to a central tippie several miles from the mine pit.

GEOLOGY

Seam(s) mined The name of the coal seam(s) mined is listed, if known. If multiple seams were mined, they are all listed, although the mined-out area for each seam may be shown on separate maps. Figure 2 shows the stratigraphic section of the coal-bearing interval in Illinois, and the vertical relations among the coals.

Depth The depth to the top of the seam in the vicinity of the shaft is listed, if known. The depth is determined from notes made by geologists who visited the mine during its operation or from drill hole data in ISGS files. Depth generally varies little over the extent of a mine; however, reported depths for an individual mine may vary. Depth for surface-mined coals varies, and is usually represented as a range.

Thickness The approximate thickness of the mined seam is shown, if known. Thickness also comes from notes of geologists who visited the mine during its operation or from borehole data in ISGS files. Minimum, maximum, and average thicknesses are given when this information is available.

Mining method The principal mining method used at the mine (figs. 1A-H) is listed. See the mining methods section at the beginning of this directory for a discussion of this parameter.

Geologic problems reported Any known geologic problems, such as faults, water seepage, floor heaving, and unstable roof, encountered in the mine are reported. This information is from notes made by ISGS geologists who visited the mine, or from reports by mine inspectors published by the Illinois Department of Mines and Minerals, or from the source map(s). Geologic problems are not reported for active mines.

PRODUCTION HISTORY

Production history Tons of coal produced from the mine by each mine owner are totaled. When the source map used for the mine outline is not a final mine map, the tonnage produced since the date of the map is identified. For mines that extend into adjacent quadrangles, the tonnage reported includes areas mined in adjacent quadrangles.

SOURCE OF DATA

Source map This section lists information about the map(s) used to compile the mine outline and the locations of tipples and mine openings. In some cases more than one source map was used. For example, a map drawn before the mine closed may provide better information on original areas of the mine than a later map. When more than one map was used, the bibliography section explains what information was taken from each source.

Date The date of the most recent mine survey listed on the source map is reported.

Original scale The original scale of the source map is listed. Many maps are photo-reductions and are no longer at their original scale. The original scale gives some indication of the level of detail of the mine outline and the accuracy of the mine boundary relative to surface features. Generally, the larger the scale, the greater the accuracy and detail of the mine map. Mine outlines taken from source maps at scales smaller than 1:24,000 may be highly generalized and may well be inaccurately located with respect to surface features.

Digitized scale The scale of the digitized map is reported. The scale may be different from that of the original source map. In many cases the digitized map was made from a photo-reduction of the original source map, or the source map was not in a condition suitable for digitizing and the mine boundaries were transferred to another base map.

Map type Source maps are classified into five categories to indicate the probable completeness of the map. See discussion of source maps in the previous section.

Annotated bibliography Sources that provide information about the mine are listed, with the data taken from each source. Some commonly used sources are described below. Full bibliographic references are given for all other sources. Unless otherwise noted, all sources are available for public inspection at the ISGS.

Coal Reports Published since 1881, these reports contain tabular data on mine ownership, production, employment, and accidents. Some volumes include short descriptions made by mine inspectors of physical features and conditions in selected mines.

Directory of Illinois Coal Mines This source is a compilation of basic data about Illinois coal mines, originally gathered by ISGS staff in the early 1950s. Sources used for this directory are undocumented, but they are primarily Illinois Department of Mines and Minerals annual reports, ISGS mine notes, and coal company officials.

ENR Document 85/01, Guither, H. D., J. K. Hines, and R. A. Bauer, 1985 The Economic Effect of Underground Mining Upon Land Used for Illinois Agriculture: Illinois Department of Energy and Natural Resources Document 85/01, 185 p.

Microfilm map The U.S. Bureau of Mines maintains a microfilm archive of mine maps. A microfilm file for Illinois is available for public viewing at the ISGS.

Mine notes ISGS geologists have visited mines or contacted mine officials throughout the state since the early 1900s. Notes made during these visits range from brief descriptions of the mine location to long narratives (including sketches) of mining conditions and geology.

Federal Land Bank of St. Louis, Preliminary Reports on Subsidence Investigations Mining engineers working for the Federal Land Bank of St. Louis mapped areas of subsidence due to coal mining in the early 1930s. These reports often include county maps of mine properties with mined-out areas including shaft locations, as well as subsidence areas.

REFERENCES

- Bain, H. F., 1905, The Fluorspar District of Southern Illinois, United States Geological Survey, Bulletin 255, 75p.
- Bauer, R. A., B. A. Trent, and P. B. Dumontelle, 1993, Mine Subsidence in Illinois: Facts for the Homeowner Considering Insurance, Illinois State Geological Survey, Environmental Geology Note 144, 16p.
- Guither, H. D., J. K. Hines, and R. A. Bauer, 1985, The Economic Effects of Underground Mining Upon Land Used for Illinois Agriculture, Illinois Department of Energy and Natural Resources Document 85/01, 185p.
- Lamar, J. E., 1948, Clay and Shale Resources of Extreme Southern Illinois, Illinois State Geological Survey, Report of Investigations 128, 107p.
- Weibel, C. P., W. J. Nelson, and J. A. Devera, 1991, Geologic map of the Waltersburg Quadrangle, Pope County, Illinois, Illinois State Geological Survey, Illinois Geologic Quadrangle Map IGQ-8, 1 sheet.
- Weller, J. M., R. M. Grogan, and F. E. Tippie, 1952, Geology of the Fluorspar Deposits of Illinois, Illinois State Geological Survey, Bulletin 76, 147p.

PART II DIRECTORY OF MINES IN THE WALTERSBURG QUADRANGLE

MINE SUMMARY SHEETS

A summary sheet on the geology and production history of each mine in the Waltersburg Quadrangle is provided. These summary sheets are arranged numerically by mine index number. Consult Part I for a complete explanation of the data listed in the summary sheet.

Mine Index 776

Samuel Sistler & Son, Sistler Mine

Type: Underground Total mined-out acreage shown: None; production indicates less than 1 acre was mined.

SHAFT, SLOPE, DRIFT or TIPPLE LOCATIONS

Type	County	Township-Range	Section	Quarters-Footage
Main drift	Pope	13S 5E	12	SW NE SW

GEOLOGY

Seam(s) Mined	Depth (ft)	Thickness (ft)			Mining Method
		Min	Max	Avg	
Reynoldsburg				2.8	Underground

Geologic Problems Reported:

PRODUCTION HISTORY

Company	Mine Name	Years	Production (tons)
Sam Sisner	Sisner	1931-1933	550
A. L. Bowman & Company	Bowman	1934-1934	200
Huey Morse	Morse	1935-1935	179
Samuel Sistler & Son	Sistler	1936-1938	283
			1,212

Last reported production: 1938

SOURCES OF DATA

Source Map	Date	Original Scale	Digitized Scale	Map Type
ISGS map library, 4107 d5.1-250	1976	1:24000	1:24000	Secondary source

Annotated Bibliography (data source, brief description of information)

Coal Reports - Production, ownership, years of operation.

Directory of Illinois Coal Mines (Pope County) - Mine names, mine index, ownership, years of operation, seam.

Mine notes (Pope County) - Mine type, drift location, thickness.

ISGS map library, 4107 d5.1-250, Bedrock Geology of a Portion of the Waltersburg Quadrangle, surveyed by Joseph W. Wildman, 1975 & 1976 - Drift location.

Mine Index 913**Mt. Zion Mining Corporation, Mt. Zion Mine**

Type: Surface Total mined-out acreage shown: 23 Production indicates less than 2 acres were mined. The area shown on the accompanying map includes the area for Rock Mine (mine index 984) and another mine whose production is not known (mine index 4186). The area shown may include land that was disturbed but not mined.

SHAFT, SLOPE, DRIFT or TIPPLE LOCATIONS

Type	County	Township-Range	Section	Quarters-Footage
Pit	Pope	13S 5E	12	NW SE SW

GEOLOGY

Seam(s) Mined	Depth (ft)	Thickness (ft)			Mining Method
		Min	Max	Avg	
Un-named coal *	20-40			3.25	Surface

* The coal mined was an un-named seam in the Abbott Formation.

Geologic Problems Reported: The coal seam contained slips at several places along the face. A few near-vertical fractures were filled with up to 0.25 inches of pyrite and carbonaceous material. Pyrite was also present along bedding planes.

PRODUCTION HISTORY

Company	Mine Name	Years	Production (tons)
Albrecht Excavating Company	Albrecht	1969-1969	Not reported **
Mt. Zion Mining Corporation	Mt. Zion	1970-1970	<u>5,955</u> 5,955

** The Coal Report listed the mine as newly opened in December 1969. Production was probably low.

Last reported production: November 1970

SOURCES OF DATA

Source Map	Date	Original Scale	Digitized Scale	Map Type
ISGS map library, 4103.P6 i5.1-1	6-30-1978	1:4800	1:4800	Secondary source

Annotated Bibliography (data source, brief description of information)

Coal Reports - Production, ownership, years of operation, mine type, depth, thickness, mining method.
 Directory of Illinois Coal Mines (Pope County) - Mine names, mine index, ownership, years of operation.
 Mine notes (Pope County) - Mine location, mine type, geologic problems.
 ISGS map library, 4103.P6 i5.1-1, map of Martin Mine (mine index 984) - Mine location, mine outline.

Mine Index 936**Western Mining, Incorporated, Shawnee Mine**

Type: Surface Total mined-out acreage shown: 10; production indicates less than 1 acre was mined.
 The area shown on the accompanying map may include land that was disturbed but not mined.

SHAFT, SLOPE, DRIFT or TIPPLE LOCATIONS

Type	County	Township-Range	Section	Quarters-Footage
Pit or tipple	Pope	12S 6E	29	SW SE SE

GEOLOGY

Seam(s) Mined	Depth (ft)	Thickness (ft)			Mining Method
		Min	Max	Avg	
Un-named *					Surface

* The coal was an un-named seam in the Tradewater Formation.

Geologic Problems Reported: The coal contained occasional pyrite nodules up to 1 inch in diameter along irregularly-spaced fractures.

PRODUCTION HISTORY

Company	Mine Name	Years	Production (tons)
Western Mining, Incorporated	Shawnee	1974-1975	<u>1.25</u> **
			1.25

** The mine was a test pit at an old mine site, considered for re-opening. The production is not an accurate total. The mine that formerly operated at that site is unknown, but was cited as an "old mine" in 1967 field work.

Last reported production: 1975

SOURCES OF DATA

Source Map	Date	Original Scale	Digitized Scale	Map Type
Waltersburg Quadrangle, IGQ-8	1991	1:24000	1:24000	Secondary source
Pope_co_03.tif	1975 & 1987	1:8448	1:8448	Secondary source

Annotated Bibliography (data source, brief description of information)

Coal Reports - Production, ownership, years of operation.

Directory of Illinois Coal Mines (Pope County) - Mine names, mine index, ownership, years of operation.

Mine notes (Pope County) - Mine location, mine type, geologic problems.

ISGS field notes (M. E. Hopkins & R. A. Peppers, 10-20-1967) - Mine location (old mine).

Weibel, C. P., W. J. Nelson, and J. A. Devera, 1991, Geologic map of the Waltersburg Quadrangle, Pope County, Illinois, Illinois State Geological Survey, Illinois Geologic Quadrangle Map IGQ-8, 1 sheet - Mine location, seam.

IDNR surface mine updates on aerial photographs, Pope_co_03.tif - Mine outline.

Mine Index 984**Bill V. Martin Mining Corporation, Rock Mine**

Type: Surface Total mined-out acreage shown: 20 Production indicates approximately 1 acre was mined, followed by approximately 2 acres mined after the map date. The area shown on the accompanying map includes the Mt. Zion Mine (mine index 913) and another mine whose ownership and production are not known (mine index 4186). The area shown may include land that was disturbed but not mined.

SHAFT, SLOPE, DRIFT or TIPPLE LOCATIONS

Type	County	Township-Range	Section	Quarters-Footage
Pit	Pope	13S 5E	12	SE SW

GEOLOGY

Seam(s) Mined	Depth (ft)	Thickness (ft)			Mining Method
		Min	Max	Avg	
Un-named *	12-35			2.5	Surface

* The coal mined was an un-named seam in the Abbott Formation.

Geologic Problems Reported: In some places, rock bands split the seam. The rock bands consisted of shale with sandstone partings or shale bands with fine clay lenses. The coal was very thinly laminated, with numerous thin discontinuous clay lenses and bands. A visual estimate indicated that the entire 2 to 4 ft coal bed was composed of up to 50% rock and clay, and the minable portion was up to 50% ash. Pyrite was locally abundant on cleat and fracture surfaces, although overall pyrite content was low, with a sample analysis of 0.42% total sulfur on an "as received" basis, one of the lowest values reported for an Illinois coal. However, with so much visible pyrite, the analysis was probably misleading.

PRODUCTION HISTORY

Company	Mine Name	Years	Production (tons)
Bill V. Martin Mining Corporation	Rock	1978-1978	4,368
Bill V. Martin Mining Corporation	Rock	1978-1978	8,151 **
			12,519

** Production after map date

Last reported production: November 1978

SOURCES OF DATA

Source Map	Date	Original Scale	Digitized Scale	Map Type
IDNR, SURRGO soil map	Undated	Unknown	Unknown	Secondary source
ISGS map library, 4103.P6 i5.1-1	6-30-1978	1:4800	1:4800	Final

Annotated Bibliography (data source, brief description of information)

Coal Reports - Production, ownership, years of operation, depth, thickness.
 Directory of Illinois Coal Mines (Pope County) - Mine names, mine index, ownership, years of operation.
 Mine notes (Pope County) - Mine type, mine location, seam, geologic problems.
 Illinois Department of Natural Resources, SURRGO soil map, provided by Dean Spindler - Mine outline.
 ISGS map library, 4103.P6 i5.1-1, permit map of the Rock Mine - Mine location, mine outline, mining method.

OTHER MINES SHOWN ON WALTERSBURG QUADRANGLE

Mine Index 2069 * NE SE SW 12-T13S-R5E, underground mine entries seen in highwall of Rock Mine (mine index 984) source: Mine notes (John Nelson, 10-1977)
Mine Index 2172 NE SE SE 31-T12S-R6E source: 1876 Atlas of Illinois
Mine Index 2296 NE SW NW 14-T12S-R6E, drift source: Illinois Geologic Quadrangle Map IGQ-8 (1991)
Mine Index 2343 NW SW NW 14-T12S-R6E, drift source: Illinois Geologic Quadrangle Map IGQ-8 (1991)
Mine Index 2433 NE NW NE 22-T12S-R6E, drift source: Illinois Geologic Quadrangle Map IGQ-8 (1991)
Mine Index 2479 NW SE NW 14-T12S-R6E, surface source: ISGS map library, 4107 d5.1-195, sheet 12 (work map of H. R. Wanless, 1934)
Mine Index 2534 NE SW SW 5-T13S-R6E source: ISGS map library, 4107 d5.1-195, sheet 12 (work map of H. R. Wanless, 1934)
Mine Index 2754 W ½ SE SE 29-T12S-R6E, surface source: Illinois Geologic Quadrangle Map IGQ-8 (1991)
Mine Index 4186 SE SE SW 12-T13S-R5E, surface source: Mine notes (J. Nelson, 10-26-1977)
Mine Index 4838 NW NW SW 14-T12S-R6E, surface, 14 inches thick source: ISGS field notes (H. R. Wanless, 8-4-1934) & Illinois Geologic Quadrangle Map IGQ-8 (1991)

* Not shown on accompanying map because of later surface mining

NON-COAL MINES IN THE WALTERSBURG QUADRANGLE

Scott Fluorspar & Lead Mine

SHAFT, SLOPE, DRIFT or TIPPLE LOCATIONS

Type	County	Township-Range	Section	Quarters-Footage
Shaft	Pope	12S 6E	10	SW SE NW
Shaft	Pope	12S 6E	10	SW SE NW
Shaft	Pope	12S 6E	10	NE SE NW

SOURCES OF DATA

Source Map	Date	Original Scale	Digitized Scale	Map Type
ISGS map library, 4103.P6 d9-6	9-1943	1:2400	1:2400	Secondary source

Annotated Bibliography (data source, brief description of information)

ISGS map library, 4103.P6 d9-6, Pace-compass survey of Ora Scott Property, J. Marvin Weller - Mine location.

Pittsburg Mine

SHAFT, SLOPE, DRIFT or TIPPLE LOCATIONS

Type	County	Township-Range	Section	Quarters-Footage
Shaft	Pope	12S 6E	16	NW NE SE

SOURCES OF DATA

Source Map	Date	Original Scale	Digitized Scale	Map Type
Bulletin 255 (H. F. Bain)	1905	(text only)	1:24000	Secondary source
Waltersburg Quadrangle	PR 1976	1:24000	1:24000	Secondary source

Annotated Bibliography (data source, brief description of information)

Bain, H. F., 1905, The Fluorspar District of Southern Illinois, United States Geological Survey, Bulletin 255, 75p. - Mine location.

Waltersburg Quadrangle, 1962, Photo-Revised 1976 - Mine location.

McClellan Fluorspar Mine

SHAFT, SLOPE, DRIFT or TIPPLE LOCATIONS

Type	County	Township-Range	Section	Quarters-Footage
Shaft *	Pope	12S 6E	11	

* The shaft was 40 feet deep to a 6 to 7 foot thick vein.

SOURCES OF DATA

Source Map	Date	Original Scale	Digitized Scale	Map Type
Bulletin 255 (H. F. Bain)	1905	(text only)	1:24000	Secondary source

Annotated Bibliography (data source, brief description of information)

Bain, H. F., 1905, The Fluorspar District of Southern Illinois, United States Geologic Survey, Bulletin 255, 75p. - Mine location, depth, thickness.

Clay Mines

SHAFT, SLOPE, DRIFT or TIPPLE LOCATIONS

Type	County	Township-Range	Section	Quarters-Footage
Shafts (4)	Pope	12S 6E	16	NW NE SE
Shaft	Pope	12S 6E	16	NE NE SE
Shaft	Pope	12S 6E	16	SW NE SE

SOURCES OF DATA

Source Map	Date	Original Scale	Digitized Scale	Map Type
ISGS map library, 4103.P6 d9-2	1-1944	1:2400	1:2400	Secondary source

Annotated Bibliography (data source, brief description of information)

ISGS map library, 4103.P6 d9-2, Pace-compass survey of clay diggings & vicinity, J. M. Weller - Mine locations.

Luella Fluorspar & Clay Mine

SHAFT, SLOPE, DRIFT or TIPPLE LOCATIONS

Type	County	Township-Range	Section	Quarters-Footage
Pit	Pope	12S 6E	10	SE

SOURCES OF DATA

Source Map	Date	Original Scale	Digitized Scale	Map Type
Bulletin 255 (H. F. Bain)	1905	(text only)	1:24000	Secondary source

Annotated Bibliography (data source, brief description of information)

Bain, H. F., 1905, The Fluorspar District of Southern Illinois, United States Geologic Survey, Bulletin 255, 75p. - Mine location.

Moore Fluorspar & Lead Mine

SHAFT, SLOPE, DRIFT or TIPPLE LOCATIONS

Type	County	Township-Range	Section	Quarters-Footage
Pit	Pope	12S 6E	31	S ½ NW

SOURCES OF DATA

Source Map	Date	Original Scale	Digitized Scale	Map Type
Bulletin 255 (H. F. Bain)	1905	(text only)	1:24000	Secondary source

Annotated Bibliography (data source, brief description of information)

Bain, H. F., 1905, The Fluorspar District of Southern Illinois, United States Geologic Survey, Bulletin 255, 75p. - Mine location.

Pierce & Kerr Mine

SHAFT, SLOPE, DRIFT or TIPPLE LOCATIONS

Type	County	Township-Range	Section	Quarters-Footage
Mine	Pope	12S 6E	16	E ½ NE SW

SOURCES OF DATA

Source Map	Date	Original Scale	Digitized Scale	Map Type
Bulletin 255 (H. F. Bain)	1905	(text only)	1:24000	Secondary source

Annotated Bibliography (data source, brief description of information)

Bain, H. F., 1905, The Fluorspar District of Southern Illinois, United States Geologic Survey, Bulletin 255, 75p. - Mine location, depth, thickness.

Pope-Hardin Mining Company

SHAFT, SLOPE, DRIFT or TIPPLE LOCATIONS

Type	County	Township-Range	Section	Quarters-Footage
Mine	Pope	12S 6E	14	NE SE SE

SOURCES OF DATA

Source Map	Date	Original Scale	Digitized Scale	Map Type
ISGS map library, 4103.P6 d5-1	1905	1:62500	1:62500	Secondary source

Annotated Bibliography (data source, brief description of information)

ISGS map library, 4103.P6 d5-1, sheet 1, Pace-compass survey of clay diggings & vicinity, J. M. Weller - Mine location.

MINES WHOSE LOCATIONS ARE NOT KNOWN, WALTERSBURG QUADRANGLE

The locations of the following mines are unknown, but the production tonnage, operating names, and nearest town were reported in the Annual Coal Reports. The operators listed below mined in or near the Waltersburg Quadrangle. The information shown is similar to that presented on the summary sheets in the previous pages of this directory. The first item is the name the mine operated under as listed in the Coal Report, then the years the mine reported. If no physical data are available, the next item listed is the total tons produced by the mine. If physical data are available, the order of presentation is as follows: type of opening for the mine (drift, slope or shaft), depth of coal in feet, and thickness of coal in feet.

The total tons mined by these unlocated mines is 350 (underground mined), which would represent less than 1 acre, depending on the recovery factor, mining method, and numerous other factors. (Note: 1 square mile = 640 acres)

BROWNFIELD

McCool (James), 1928-1930, underground

350 tons

INDEX OF MINES IN THE WALTERSBURG QUADRANGLE

Albrecht Excavating Company	10
Bowman (A. L.) & Company	9
Clay Mines	14
Luella Fluorspar & Clay Mine	14
Martin (Bill V.) Mining Corporation	12
McClellan Fluorspar Mine	14
McCool (James)	16
Moore Fluorspar & Lead Mine	15
Morse (Huey)	9
Mt. Zion Mining Corporation	10
Pierce & Kerr Mine	15
Pittsburg Mine	13
Pope-Hardin Mining Company	15
Rock Mine	12
Scott Fluorspar & Lead Mine	13
Shawnee Mine	11
Sisner (Sam)	9
Sistler (Samuel) & Son	9
Western Mining, Incorporated	11

